



4-Way Reactive High Power Dividers


FEATURES

- ❖ Low Insertion Loss
- ❖ Low VSWR
- ❖ Broadband
- ❖ High Frequency Models Available
- ❖ High Power Handling
- ❖ Wide Operating Temperature Range

SPECIFICATIONS

4-Way Reactive High Power Dividers							
Model Number	Freq (GHz)	Insertion Loss (dB)		Input VSWR		CW Power (Watt)	Outline Figure
		Typ	Max	Typ	Max		
4DHFA-1D7	0.7-2.7	0.15	0.2	1.15:1	1.20:1	500	1
4DHSA-1D5	0.8-2.2	0.08	0.10	1.15:1	1.20:1	500	2

Note 1. Standard connectors are N female. Other connector type and frequency band are available on request.

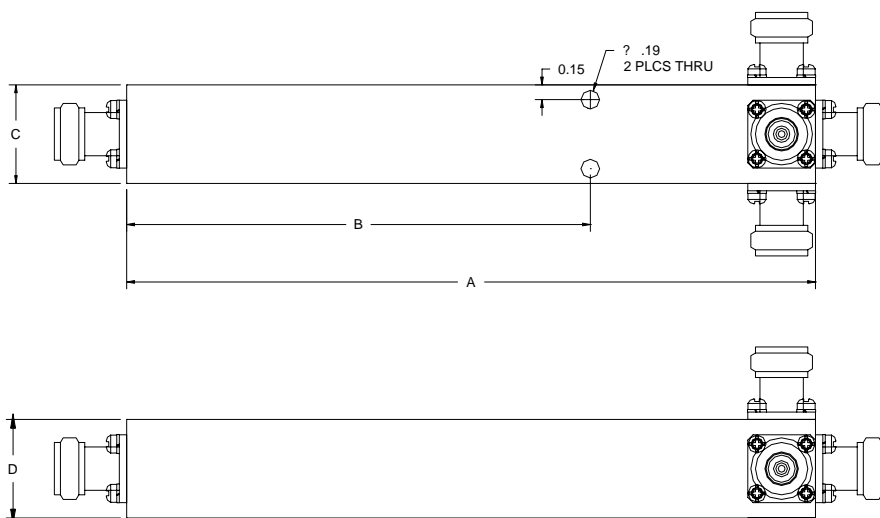

Outline				
Figure	A (inch)	B (inch)	C (inch)	D (inch)
1	7.8	5.2	1.0	1.0
2	6.8	4.5	1.0	1.0