



# BGV204N 0.02 – 4 GHz Type N Bias Tee



## FEATURES

- ❖ High DC Voltage
- ❖ Low Insertion Loss
- ❖ Low VSWR
- ❖ Small Package



## SPECIFICATIONS

0.02 – 4 GHz Type Bias Tee	
Model Number	BGV204N
Frequency Range	0.02 – 4 GHz
DC Current	4 A Max.
DC Voltage	200 V
Insertion Loss	0.8 dB Typ., 1.0 dB Max.
RF Port VSWR	1.25:1 Typ., 1.35:1 Max.
RF+DC Port VSWR	1.20:1 Typ., 1.35:1 Max.
RF to DC Isolation	30 dB Typ., 26 dB Min.
RF Power Handling	10 Watt CW Min.
Impedance	50Ω Nom.
Connector Type	RF: N Male, RF+DC: N Female, DC: BNC Female

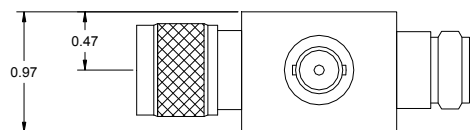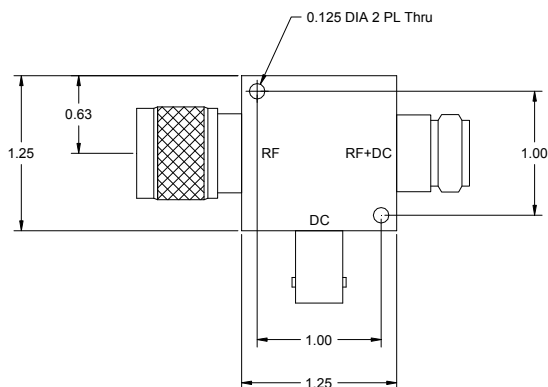

Design to meet the following environmental ratings: (verification optional)

1. Operating Temp: -55°C to +85°C
2. Storage Temp: -65°C to +125°C
3. Shock: MIL-STD-202F, M213, Cond B
4. Altitude: MIL-STD-202F, M105, Cond B
5. Vibration: MIL-STD-202F, M204, Cond B
6. Thermal Shock: MIL-STD-202F, M107, Cond A
7. Temp. Cycle: MIL-STD-202F, M105C, Cond D
8. Humidity: MIL-STD-202F, M103, Cond B (Optional with Hysol seal)

Standard Finishing: Rugged Aluminum Housing. Optional finishing with blue epoxy paint per MIL-C-22750 available on request.

Note:

1. Solder post at DC port available on request.
2. Standard connector is SMA female for all ports
3. Power handling is tested at 2 GHz