



## DG3040P 30 – 40 GHz Zero Bias Positive Schottky Detector


### FEATURES

- ❖ Excellent Flatness vs. Frequency
- ❖ Excellent Input RF Matching
- ❖ Mounting Holes Option
- ❖ No Bias Required



### SPECIFICATIONS

<b>30 – 40 GHz Zero Bias Positive Schottky Detector</b>	
Model Number	DG3040P
Frequency Range	30 – 40 GHz
Sensitivity	250 mV/mW Typ., 150 mV/mW Min.
Flatness vs. Frequency	$\pm 0.50$ dB Typ., $\pm 0.80$ dB Max.
TSS	-40 dBm Typ.
Maximum Input Power	+20 dBm
Output Polarity	Postive
Connector Type	RF: 2.92 mm Female, Detection: SMA Female
Impedance	50 $\Omega$

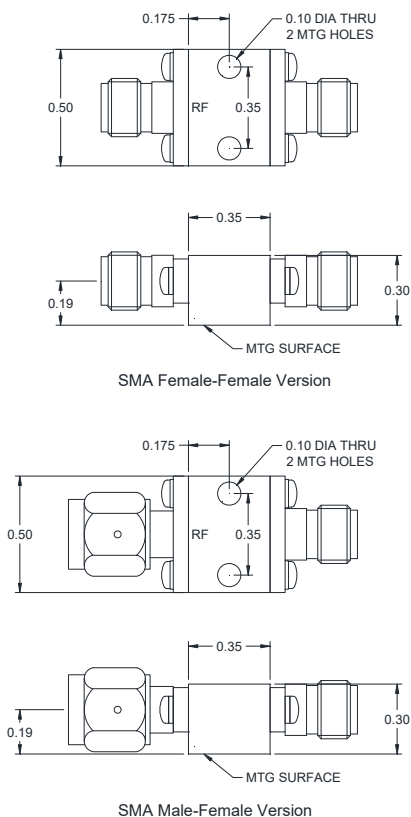

Design to meet the following environmental ratings:  
(verification optional)

1. Operating Temp: -55°C to +85°C
2. Storage Temp: -65°C to +125°C
3. Shock: MIL-STD-202F, M213, Cond B
4. Altitude: MIL-STD-202F, M105, Cond B
5. Vibration: MIL-STD-202F, M204, Cond B
6. Thermal Shock: MIL-STD-202F, M107, Cond A
7. Temp. Cycle: MIL-STD-202F, M105C, Cond D
8. Humidity: MIL-STD-202F, M103, Cond B  
(Optional with Hysol epoxy seal)

Standard Finishing: Rugged Aluminum Housing.  
Optional finishing with blue epoxy paint per MIL-C-22750 available on request to meet the humidity specification MIL-STD-202F, M103, Cond B

Note:

1. The standard connector is 2.92 mm female for RF input and SMA female for detection output, suffix MF for 2.92 mm male for RF input and SMA female for detection output
2. The sensitivity is measured at -20 dBm input power with an open circuit load (>10k Ohm)
3. Other frequency range available on request