



## S11020A 0.1 – 20 GHz SPST Absorptive Switch


### FEATURES

- ❖ Miniaturized Package
- ❖ TTL Compatible Logic
- ❖ DC Blocks at All Ports
- ❖ Operates at  $\pm 5V$  DC Supply



### SPECIFICATIONS

<b>0.1 – 20 GHz SPST Absorptive Switch</b>	
Model Number	S11020A
Frequency Range	0.1 – 20 GHz
Insertion Loss	3.5 dB Typ., 3.9 dB Max.
Isolation	55 dB Typ., 40 dB Min.
VSWR at ON state	1.50:1 Typ., 1.65:1 Max.
VSWR at OFF state	1.60:1 Typ., 1.90:1 Max.
Switching Speed	200 ns Typ., 500 ns Max.
RF Power	27 dBm CW Max.
DC Supply	+5V, -5V
RF Connector Type	SMA Female
DC Interface	Solder PIN

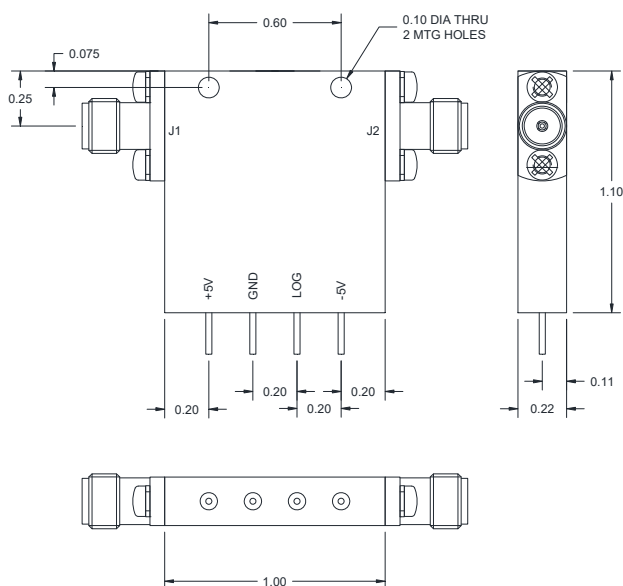

Design to meet the following environmental specifications: (verification optional)

1. Operating Temp: -55°C to +85°C
2. Storage Temp: -65°C to +125°C
3. Shock: MIL-STD-202F, M213, Cond B
4. Altitude: MIL-STD-202F, M105, Cond B
5. Vibration: MIL-STD-202F, M204, Cond B
6. Thermal Shock: MIL-STD-202F, M107, Cond A
7. Temp. Cycle: MIL-STD-202F, M105C, Cond D
8. Humidity: MIL-STD-202F, M103, Cond B  
(Optional with Hysol epoxy seal)

Standard Finishing: Rugged Aluminum Housing, optional finishing with blue epoxy paint per MIL-C-22750 available on request.

Note:

1. Control:
  - TTL=1: J1-J2 low loss
  - TTL=0: J1-J2 Isolation
2. Switching speed: 10% to 90% RF
3. Standard connector is SMA female for all the ports
4. Other connector combination is available on request