



DG1226/DG1226P 12 – 26.5 GHz Zero Bias Schottky Detector


FEATURES

- ❖ Excellent Flatness vs. Frequency
- ❖ Mounting Holes Option
- ❖ No Bias Required
- ❖ High Sensitivity



SPECIFICATIONS

12 – 26.5 GHz Zero Bias Schottky Detector		
Parameter	Negative Polarity	Positive Polarity
Model Number	DG1226	DG1226P
Frequency Range	12 – 26.5 GHz	12 – 26.5 GHz
Sensitivity	1000 mV/mW Typ., 600 mV/mW Min.	800 mV/mW Typ., 500 mV/mW Min.
Flatness vs. Frequency	± 0.9 dB Typ., ± 1.2 dB Max.	± 0.9 dB Typ., ± 1.2 dB Max.
TSS	-40 dBm Typ.	-40 dBm Typ.
Maximum Input Power	+20 dBm	+20 dBm
Output Polarity	Negative	Positive
Connector Type	RF: SMA Male, DC: SMA Female	RF: SMA Male, DC: SMA Female

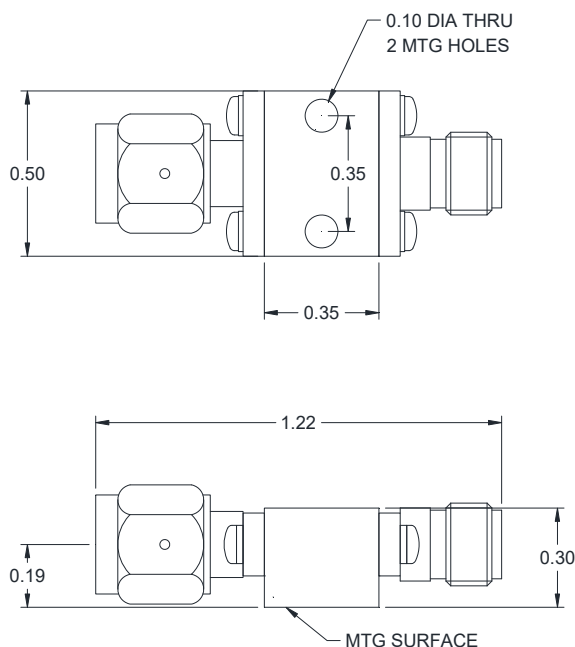

Design to meet the following environmental ratings: (verification optional)

1. Operating Temp: -55°C to +85°C
2. Storage Temp: -65°C to +125°C
3. Shock: MIL-STD-202F, M213, Cond B
4. Altitude: MIL-STD-202F, M105, Cond B
5. Vibration: MIL-STD-202F, M204, Cond B
6. Thermal Shock: MIL-STD-202F, M107, Cond A
7. Temp. Cycle: MIL-STD-202F, M105C, Cond D
8. Humidity: MIL-STD-202F, M103, Cond B
(Optional with Hysol epoxy seal)

Standard Finishing: Rugged Aluminum Housing.
Optional finishing with blue epoxy paint per MIL-C-22750 available on request to meet the humidity specification MIL-STD-202F, M103, Cond B

Note:

1. The standard connector is SMA Male/female, other connector available on request
2. The sensitivity is measured into an open circuit load (>10k Ohm)
3. Other frequency range available on request
4. The sensitivity is tested at -20 dBm input power