




**D81840 18 – 40 GHz 8-Way Power Divider/Combiner**


**FEATURES**

- ❖ Low VSWR
- ❖ High Isolation
- ❖ Small Package
- ❖ Light Weight



**SPECIFICATIONS**

<b>18 – 40 GHz 8-Way Power Divider/Combiner</b>	
Model Number	D81840
Frequency Range	18 – 40 GHz
Insertion Loss	2.80 dB Typ., 3.10 dB Max.
Isolation	16 dB Typ., 14 dB Max.
Input VSWR	1.40:1 Typ., 1.50:1 Max.
Output VSWR	1.45:1 Typ., 1.55:1 Max.
Amplitude Balance	±0.40 dB Typ., ±0.60 dB Max.
Phase Balance	±5.0° Typ., ±8.0° Max.
Power Handling as Divider	30 CW Max.
Impedance	50Ω
Connector Type	2.92 mm Female

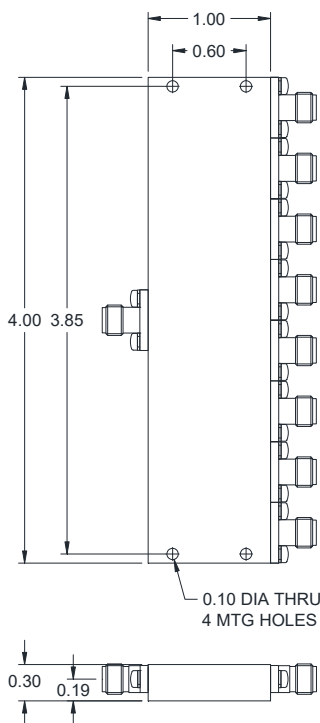

Design to meet the following environmental specifications: (verification optional)

1. Operating Temp: -55°C to +85°C
2. Storage Temp: -65°C to +125°C
3. Shock: MIL-STD-202F, M213, Cond B
4. Altitude: MIL-STD-202F, M105, Cond B
5. Vibration: MIL-STD-202F, M204, Cond B
6. Thermal Shock: MIL-STD-202F, M107, Cond A
7. Temp. Cycle: MIL-STD-202F, M105C, Cond D
8. Humidity: MIL-STD-202F, M103, Cond B  
(Optional with Hysol epoxy seal)

**Standard Finishing**

Housing: Rugged Conductive Aluminum Housing  
Connector Housing: Passivated Stainless Steel  
Connector Center PIN: Beryllium copper, Gold plated

**Note:**

1. Insertion loss refers to the sum of the output power to the input power
2. Standard connector is 2.92 mm female for all the ports
3. Other connector combination is available on request
4. Power handling is under the condition that all the outputs are connected to the loads with 1.25:1 or better VSWR and the unit is mounted with excellent heat sink